





DC POWER

电池小体积、大通流低残压防护方案


Small size, High Surge Rating Low Clamping Voltage protecting solutions of battery




Mobile phone



LPZ2




BV-FE05ZA



$V_C \leq 9V @ 8/20\mu s 100A$ $V_{BR} \geq 6V$
DFN1610-2L Package

槟城创新方案

Bencent's innovative solutions

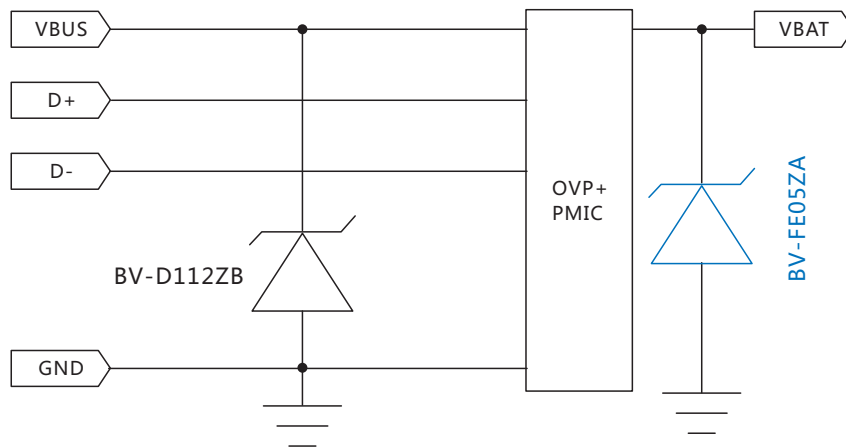

Off state Voltage V_{DRM} (V)	I_{DRM} 25°C(μA) Max	Breakdown Voltage		Clamp Voltage		Clamp Voltage		Capacitance C_o (pF) 0V@1MHz Max	Surge Waveform (μs)	Ppp (W)	Package	Size L*W*H (mm)	Mark
		V_{BR} (V) Min	I_R (mA)	V_C (V) Max	@ I_{PP} (A)	V_C (V) Max	@ I_{PP} (A)						
5	1	6	1	9	100	13	140	2000	8/20μs	1800	DFN1610-2L	1.6×1.0×0.5	U5Z



深圳市槟城电子有限公司
Shenzhen Bencent Electronics Co.,Ltd.
+86-755-26515027/26515060-808
www.bencent.com.cn